
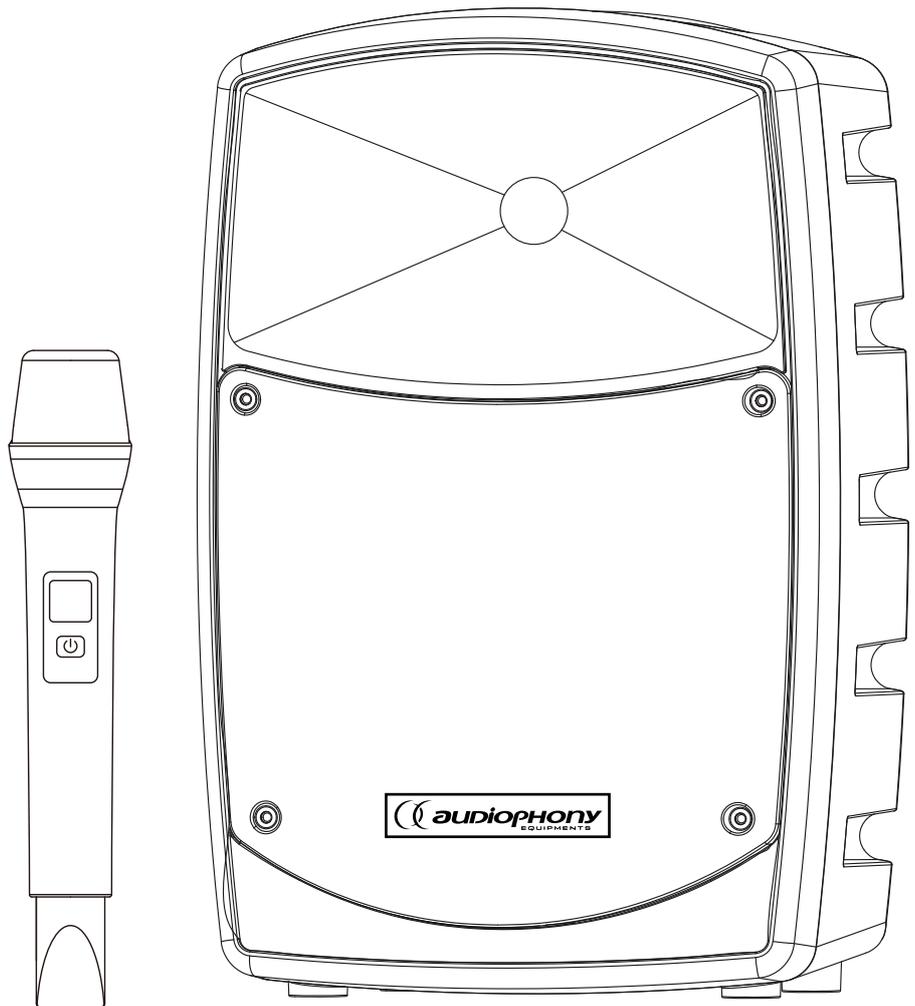


BLUETOOTH® SOUND SYSTEM WITH USB PLAYER & 1 HANDHELD MIC

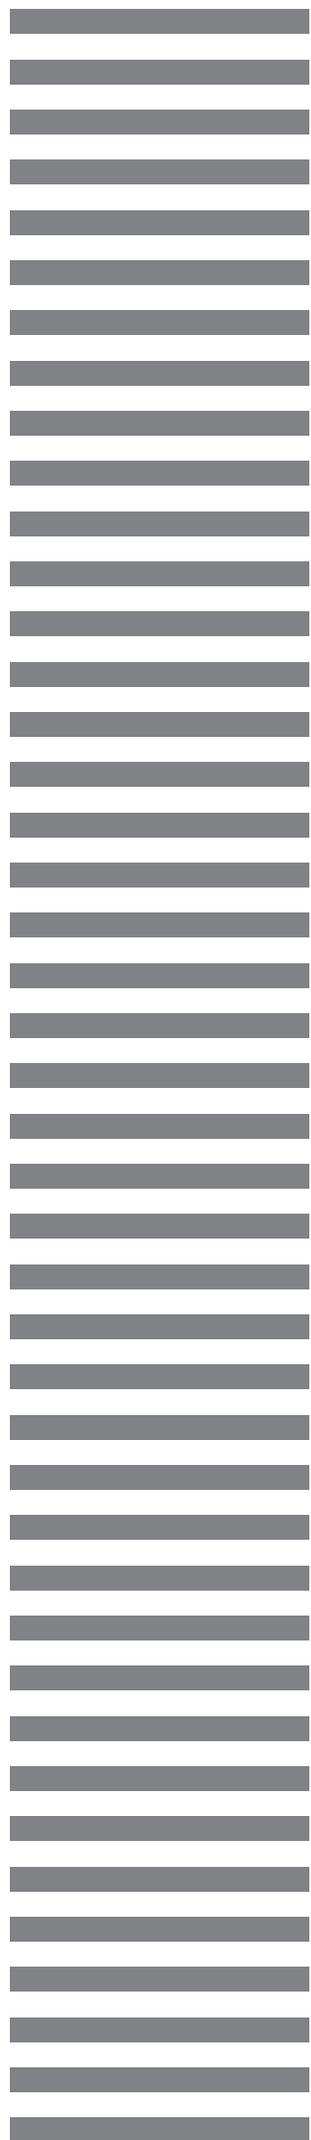

CR80A-COMBO MK2

USER GUIDE

H10983 - Version 1.0 july 2019

1 - Safety information

Important safety information



This unit is intended for indoor use only. Do not use it in a wet, or extremely cold/hot locations. Failure to follow these safety instructions could result in fire, electric shock, injury, or damage to this product or other property.



Any maintenance procedure must be performed by a CONTEST authorised technical service. Basic cleaning operations must thoroughly follow our safety instructions.



This product contains non-isolated electrical components. Do not undertake any maintenance operation when it is switched on as it may result in electric shock.

Symbols used



This symbol signals an important safety precaution.



The WARNING symbol signals a risk to the user's physical integrity. The product may also be damaged.



The CAUTION symbol signals a risk of product deterioration.

Instructions and recommendations

1 - Please read carefully :

We strongly recommend to read carefully and understand the safety instructions before attempting to operate this unit.

2 - Please keep this manual :

We strongly recommend to keep this manual with the unit for future reference.

3 - Operate carefully this product :

We strongly recommend to take into consideration every safety instruction.

4 - Follow the instructions:

Please carefully follow each safety instruction to avoid any physical harm or property damage.

5 - Avoid water and wet locations :

Do not use this product in rain, or near washbasins or other wet locations.

6 - Installation :

We strongly encourage you to only use a fixation system or support recommended by the manufacturer or supplied with this product. Carefully follow the installation instructions and use the adequate tools.

Always ensure this unit is firmly fixed to avoid vibration and slipping while operating as it may result in physical injury.

7 - Ceiling or wall installation :

Please contact your local dealer before attempting any ceiling or wall installation.

8 - Ventilation :

The cooling vents ensure a safe use of this product, and avoid any overheating risk. Do not obstruct or cover these vents as it may result in overheating and potential physical injury or product damage. This product should never be operated in a closed non-ventilated area such as a flight case or a rack, unless cooling vents are provided for the purpose .

9 - Heat exposure :

Sustained contact or proximity with warm surfaces may cause overheating and product damages. Please keep this product away from any heat source such as a heaters, amplifiers, hot plates, etc...

CAUTION

RISK OF ELECTRIC SHOCK

DO NOT OPEN

WARNING : This unit contains no user-serviceable parts. Do not open the housing or attempt any maintenance by yourself. In the unlikely even your unit may require service, please contact your nearest dealer.

In order to avoid any electrical malfunction, please do not use any multi-socket, power cord extension or connecting system without making sure they are perfectly isolated and present no defect.

Sound levels

Our audio solutions deliver important sound pressure levels (SPL) that can be harmful to human health when exposed during long periods. Please do not stay in close proximity of operating speakers.

Recycling your device

- As HITMUSIC is really involved in the environmental cause, we only commercialise clean, ROHS compliant products.
- When this product reaches its end of life, take it to a collection point designated by local authorities. The separate collection and recycling of your product at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

10 - Electric power supply :

This product can only be operated according to a very specific voltage. These information are specified on the label located at the rear of the product.

11 - Power cords protection:

Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at lugs, convenience receptacles and the point where they exit from the fixture.

12 - Cleaning precautions :

Unplug the product before attempting any cleaning operation. This product should be cleaned only with accessories recommended by the manufacturer. Use a damp cloth to clean the surface. Do not wash this product.

13 - Long periods of non use :

Disconnect the unit's main power during long periods of non use.

14 - Liquids or objects penetration :

Do not let any object penetrate this product as it may result in electric shock or fire. Never spill any liquid on this product as it may infiltrate the electronic components and result in electric shock or fire.

15 - This product should be serviced when :

Please contact the qualified service personnel if :

- The power cord or the plug has been damaged.
- Objects have fallen or liquid has been spilled into the appliance.
- The appliance has been exposed to rain or water.
- The product does not appear to operate normally.
- The product has been damaged.

16 - Inspection/maintenance :

Please do not attempt any inspection or maintenance by yourself. Refer all servicing to qualified personnel.

17 - Operating environment :

Ambient temperature and humidity: +5 - +35°C, relative humidity must be less than 85% (when cooling vents are not obstructed).

Do not operate this product in a non-ventilated, very humid or warm place.

2 - Introduction

Thank you for purchasing the CR80A-COMBO MKII.


- All-in-one solution
- High performance and sound quality
- Media player and 1 UHF microphone with 8 channels

The CR80A-COMBO MKII is a powerful all-in-one sound system producing a high-quality sound output, adapted to any mobile installation.

It features a USB reader, a Bluetooth® receiver, one UHF handheld microphone and a mixer allowing you to plug one extra microphone and an external source. In brief: it is complete, powerful, and easy to use. Light and compact, it can also be battery-operated thanks to its built-in Lithium battery.

- Light, powerful and reliable Lithium battery
- Supplied with 1 UHF handheld microphone

3 - The modules

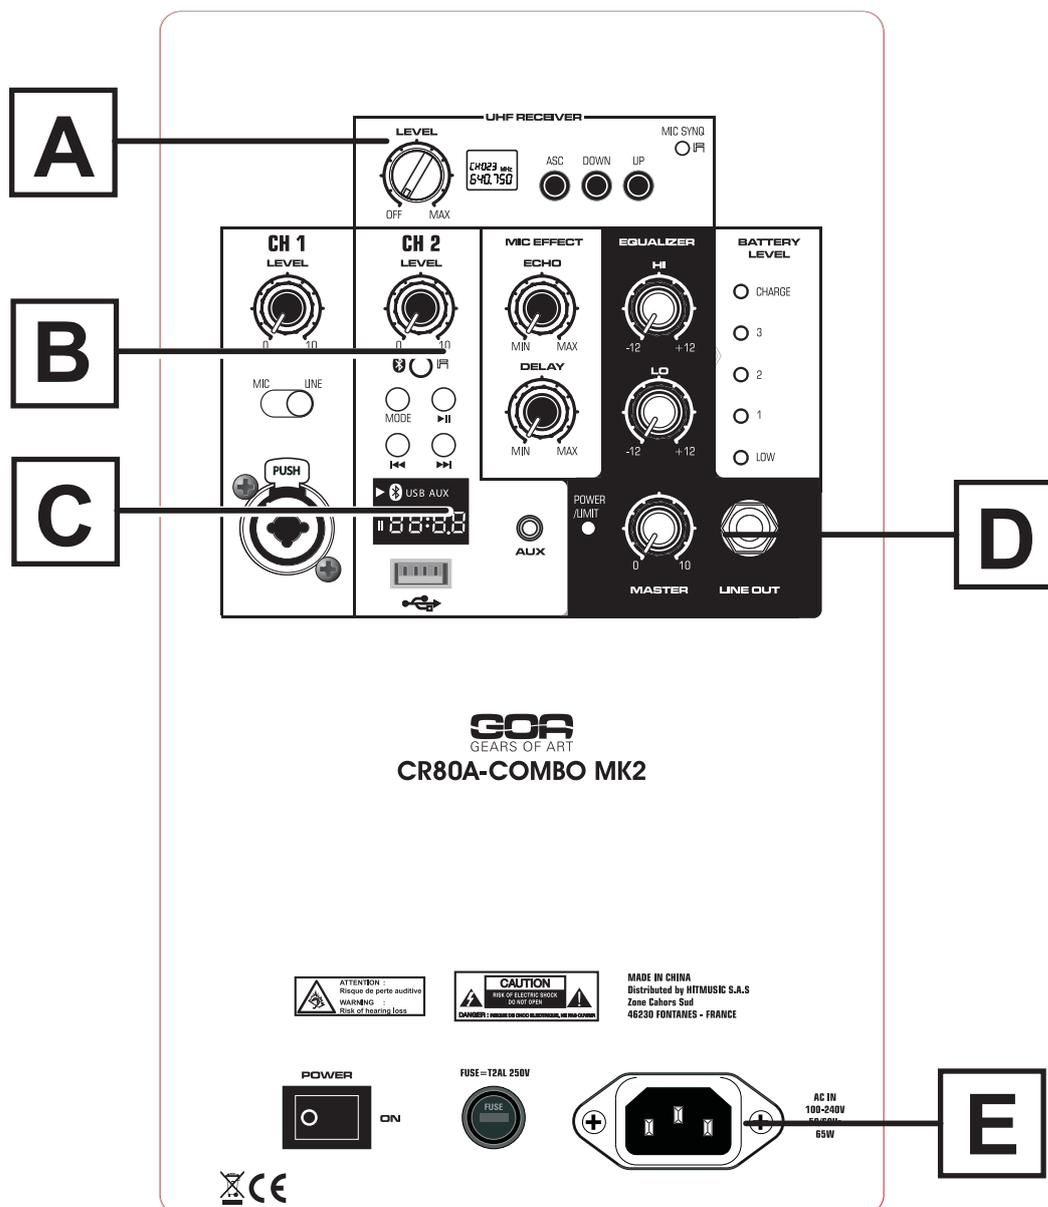

A - UHF receiving module

B - Mixing zone


C - USB/Bluetooth® module

D - Master zone

E - Power supply socket

4 - Description of the modules

4 - 1 : UHF receiving module

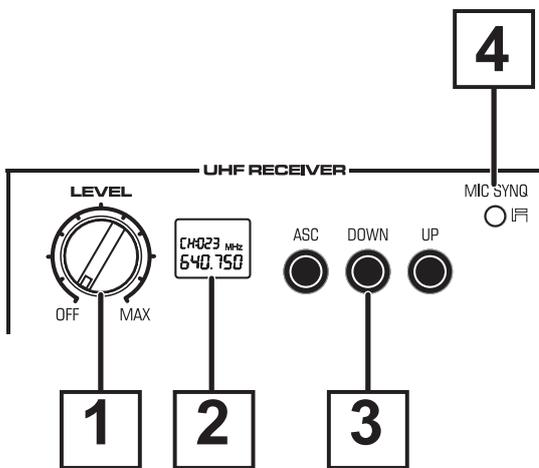


A1 - Volume control knob for the HF module. From OFF to full power (clockwise).

A2 - Control display for the channel and frequency

A3 - Channel selector allow you to choose one of the 8 channels available

A4 - IR diode to synchronize the mic and the receiver

4 - 2 : USB/Bluetooth® module

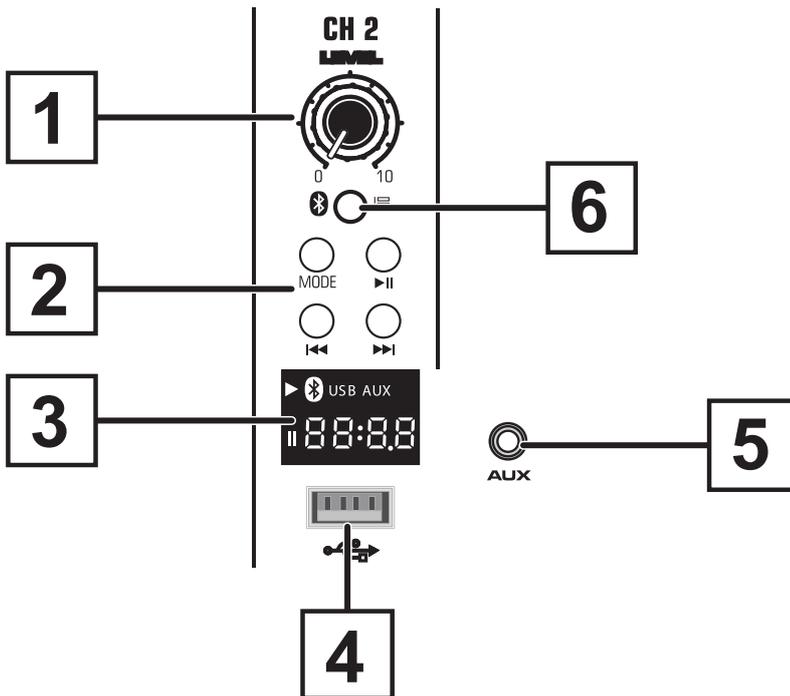

B1 - Volume control knob

B2 - Command panel of the reader:
MODE:

Allows you to switch from USB/ AUX to the Bluetooth® receiver: the display will indicate «bt» when you switch to Bluetooth® MODE.

B3 - Reader display.

B4 - USB mass storage socket for USB key.

B5 - AUX input line level

B6 - IR diod to receive the remote control commands.

1st Bluetooth® pairing:


Switch to Bluetooth® mode. The display will indicate «bt» blinking.

Turn your Bluetooth® source ON and scan for devices.

Select «Bluetooth» in the list, and accept the pairing.

The CR80A-COMBO MKII display should indicate «bt» and stop blinking.

4 - 3 : Remote control

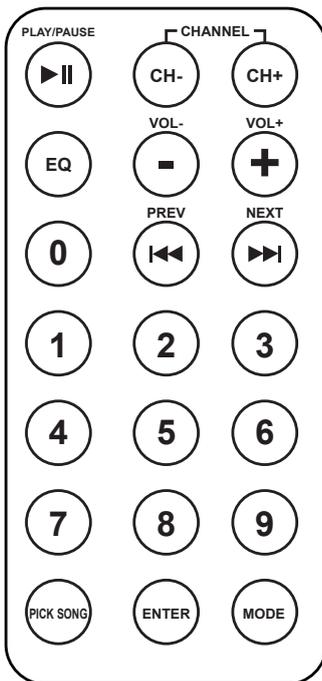

The infrared remote control of your reader allows you to remotely control some functions for your USB or Bluetooth® sources.

The CH- and CH+ buttons are deactivated with this device.

The «EQ» button allows you to navigate and choose one of the equalizer presets configured for each style, such as: NORMAL, POP, ROCK, JAZZ, CLASSical, COUNTRY, BASSs...

The ENTER button allows you to enter the menu:

BRO : Start to play the first 10 seconds of each file

ALL : repeat ALL the tracks

ONE : repeat the current track

FOD : start playing each folder

NOR : Normal play mode


RDO : Random play

4 - 4 : Mixer


C1 - Volume control knob. From minimum to maximum (clockwise).

C2 - Channel input selector. Allows you to choose the type of source you want to connect.

C3 - Combo XLR / Jack 6.35 socket. Allows you to plug an instrument or microphone.

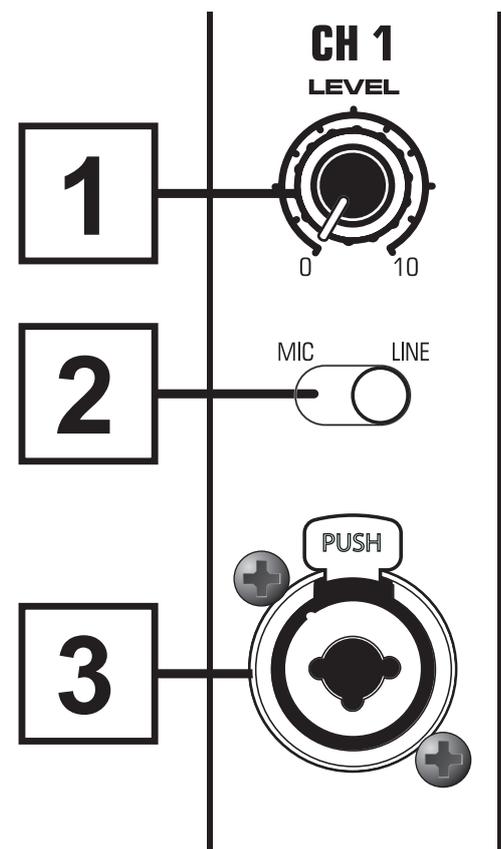

4 - 5 : Master

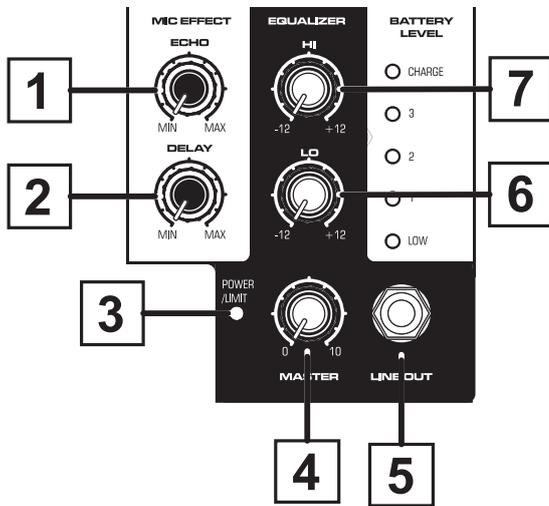

D1 - ECHO effect control knob for the wire and wireless mic.
D2 - DELAY effect control knob for the wire and wireless mic.
D3 - POWER/LIMIT indicator. Indicates if the sound system is ON and the limiter activated.

Lights blue to indicate the system is activated.
 Lights red when the limiter is activated. Please decrease the input level of your sources in such case.

D4 - MASTER volume control fader.
 From minimum to maximum (clockwise). This fader affects the main volume output.
D5 - LINE OUT output carrying the line-level main signal of each channel via stereo Jack 6.35.


Allows you to connect another amplified system.

D6 - LOw control knob for the main bass level
D7 - Hgh control knob for the main treble level

LED battery indicator.

It is crucial to charge the batteries when the LOW indicator is lit. The CHARGE indicator lights green when the charge process is completed.

4 - 6 : Power supply

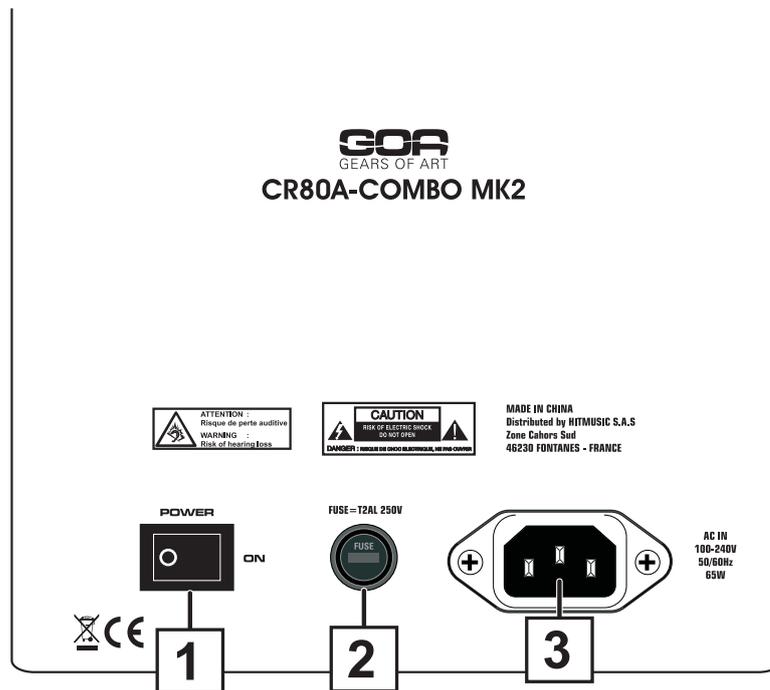

E1 - ON/OFF switch.

E2 - Fuse holder.

Please make sure to replace the fuse only with the exact same model. Fuse: T2AL 250V

E4 - Power plug.

Allows you to connect your sound system to an electrical outlet and recharge its batteries and/or turn it ON.

Note about batteries :



Please only use original DC22,2V 2,2AH Li-ion battery

New battery should be charged before being used. The CR80A COMBO MKII has been designed to charge it's battery only.


Please turn off the unit during periods of non-use in order to preserve the battery.

The battery can be severely damaged if it's fully discharged because the unit remained turned ON.

Moreover, the battery must be charged regularly to prevent them from drying.

We strongly advise you to charge the battery at least once every three months.

This battery is considering like accessory parts and thus cannot be covered by the guarantee.

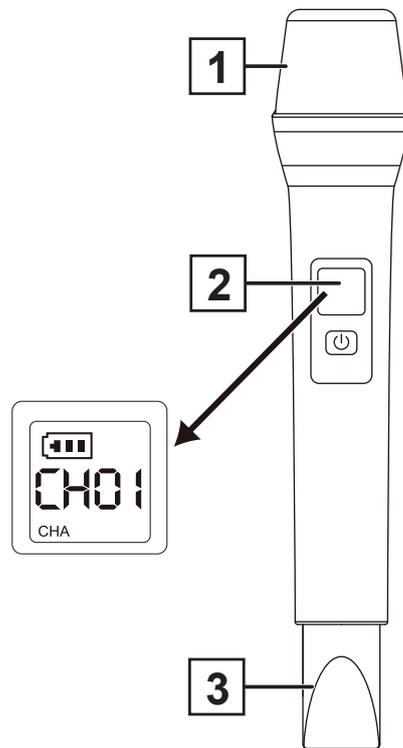4 - 7 : Handheld microphone

1 - Grille: Protects the capsule.

2 - ON/OFF Power switch and display

3 - LR06 x 2 battery compartment. Please respect the polarities when changing batteries.

5 - Technical specifications

Loudspeaker	6.5" loudspeaker + 1" titanium driver, total impedance: 4 Ohms
Power	80W RMS / 160 max Class D amplifier
Response curve	80 - 20k Hz
Sound pressure level	113 dB SPL max
HF microphone	8 channel UHF Handheld cardioid-dynamic microphone
Frequency range	UHF 823-832 / 863-865 Mhz - 10 mW
Reader	Built-in USB key reader and Bluetooth® receiver Supplied with an infrared remote control
Bluetooth®	The player features a Bluetooth® receiver Type V4.2 AVRCP, with an excellent, close-to-digital audio transmission
Finish	Polypropylene housing, metal mesh grill. C36 mounting plate for speaker stands
Dimensions (in mm)	375 x 240 x 210
Net weight (incl. batteries)	5.9 kg

Internal battery:

Battery	1x DC22,2V 2,2AH Li-ion
Autonomy	5 hours depending on the volume
Charging time	6 hours to recharge the two batteries
Power management	LED display to indicate the charge level. Charge it and use it at the same time. Automatic shutdown if the battery level is too low.

Because AUDIOPHONY® takes the utmost care in its products to make sure you only get the best possible quality, our products are subjects to modifications without prior notice. That is why technical specifications and the products physical configuration might differ from the illustrations.

Make sure you get the latest news and updates about the AUDIOPHONY® products on www.audiophony.com

AUDIOPHONY® is a trademark of HITMUSIC S.A.S - Zone Cahors sud - 46230 FONTANES - FRANCE