
audiophony® EQUIPMENTS

SLine112Sub

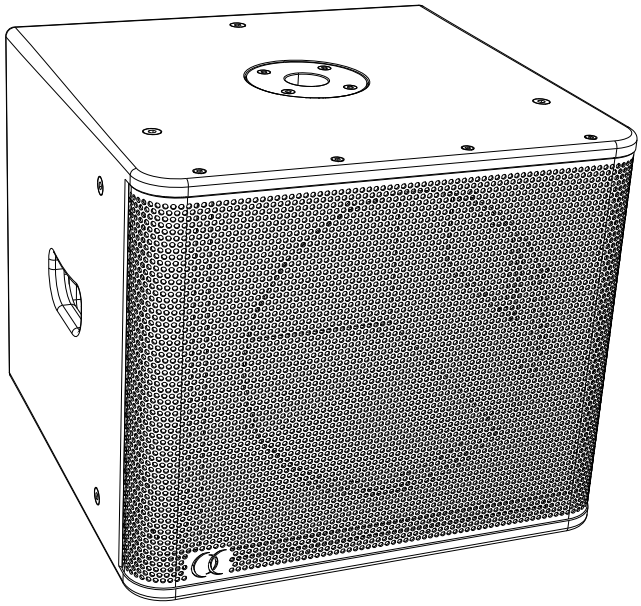


Passive 1x12" 8-ohm subwoofer cabinet for installation

Intricate cabinet-making and a understated finish that's very much in vogue.
Deep, dynamic bass in a compact design.
Ideal for use alongside Sline speakers, from background music systems to more sophisticated sound systems.

Sline112SubB, black version (black) H11735
Sline112SubW, white version (white) H11736

Powers	350 W RMS – 700 W max / 8 ohms
Components	1 x 12" speaker(VC 3") with a ferrite magnet and paper cone
Max. SPL	127 dB max.
Sensitivity (1W/1m)	96 dB
Frequency response	40 – 300 Hz (-3 dB)
Construction	MDF wood finish and metal grille with acoustic foam, 2 handles, 36mm mounting flange for a coupling bar. 12 M10 inserts.
Connections	Euroblock and Speakon IN and OUT connectors (1+/1-)
Dimensions	375 x 445 x 445 mm
Net weight	23 kg


Dimensions

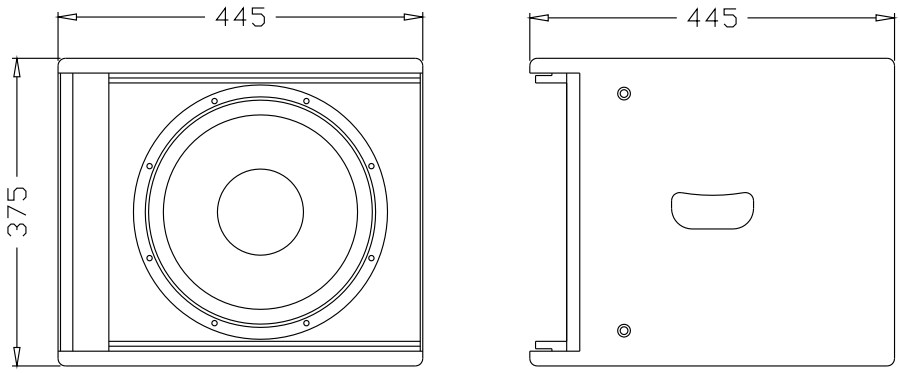


Wiring

The cabinet has two types of connections wired in parallel: either Speakon or Eurobloc, as shown opposite.

Please ensure that the minimum impedance and power requirements are met when selecting your amplifier. Use cables with a cross-sectional area of at least 1.5 mm².

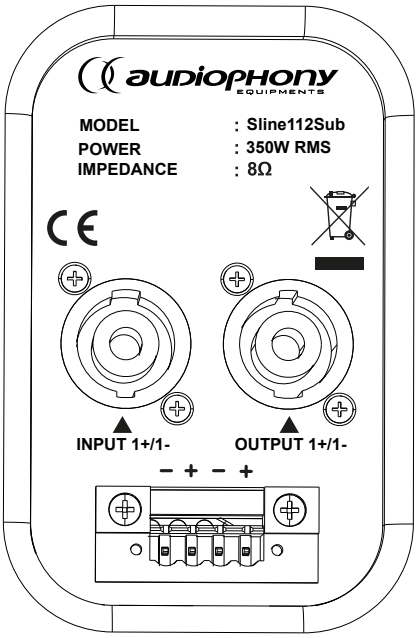

Frequency response

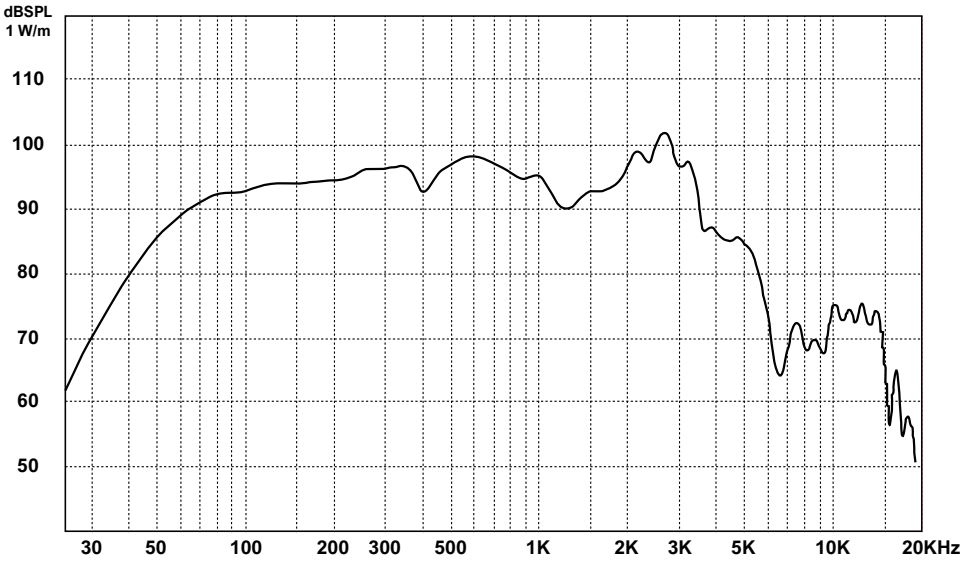

AUDIOPHONY® takes the utmost care in manufacturing its products to ensure the highest quality. Changes may therefore be made without prior notice. Consequently, the technical specifications and physical design of the products may differ from the specifications and illustrations shown in this manual.
To receive the latest news and updates on AUDIOPHONY® products, please visit www.audiophony.com
AUDIOPHONY® is a trademark of HITMUSIC S.A.S – 595 rue de la Pièce Grande – 46230 Fontanes – France